

SUPERIOR "ALL-STAR MVP" WELDED ATHLETIC LOCKER (PRODUCT No. ASTF- \_ \_ \_ )
ELEVATION ' '

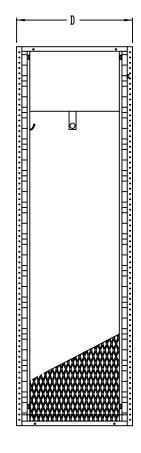

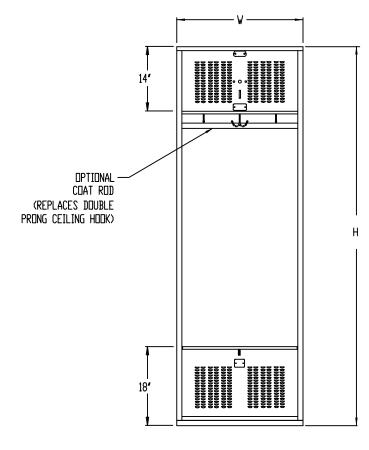

LOCKER DETAILS :

EXTERIOR COLOR =

INTERIOR COLOR = SAME AS EXTERIOR

TOP = FLAT

LOCKS = FOOT LOCKER PAD LOCK ONLY

LOCKS = DOOR PAD LOCK OR BUILT-IN

DOOR VENTILATION = SECURITY-PLUS

SIDE VENTILATION = 1/2" 13GA, FLT/EXP/MTL

BASE

COAT ROD = 1' STAINLESS STEEL (OPTIONAL)

DOOR HINGE = 3/16' DIAMETER CONTINUOUS HINGE ROD WITH CONCEALED

FASTENER

SEAT HINGE = CONTINUOUS FULL LENGTH PIAND HINGE WELDED TO SEAT AND

RIVETED TO FRAME

CONTRACTOR NOTE

ALL CONCRETE BASES SHOULD BE LEVEL AND TROVELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4' FROM THE TOP EDGE OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

FULL SECURITY DOOR = 14 GA., C.R.S.

SECURITY-PLUS VENTS

SEAT = 14 GA., C.R.S. (REINFORCED) FOOT LOCKER FRONT = 14 GA., C.R.S.

SECURITY-PLUS VENTS

BASE = 14 GA., C.R.S. TOP = 16 GA., C.R.S. SHELF = 16 GA., GALVANNEAL

SIDES = 1/2" 13 GA. FLT/EXP/MTL, H.P.D.

BACKS = 18 GA., C.R.S.

SIDE VIEW

FRONT VIEW



THIS DRAWING AND THE IN PROPERTY OF LIST INDUS	FORMATION ON IT IS	THE CONFIDENTIAL
DISCLOSED TO OTHERS WITH	OUT WRITTEN PERMISS	ION. ONLY LIST INDUSTRIES
RESERVES THE RIGHT TO A MODIFICATIONS RELEASES L		
TOLERANCES UNLESS FRACTIONS: ±1/32	SPECIFIED: DECIMALS: ±.010	)

Customer: CUSTOMER		Drawn By: DRAFTER	Checked By:	Date: DATE		Scale: NONE	
Customer Order N	lumber: PO#		_L GE_NUMBER	1 0		Of #	Revision:
Description:	JOB NAME JOB LOCATION	Drawing Number:		NUMBE		<u>υ π</u>	NOVISION.