

LIST "MARQUIS BOOKSAFE III" WELDED SINGLE TIER LOCKER (18" OR 24" WIDE) (PRODUCT No. BSW -1)

FLEVATION ' '

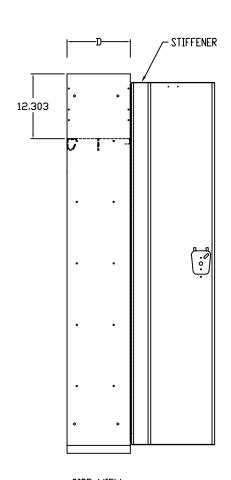

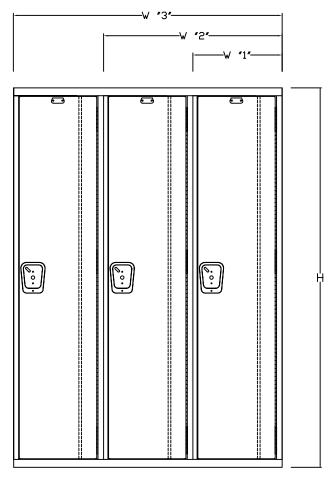

LOCKER DETAILS:

EXTERIOR COLOR =

INTERIOR COLOR = SAME AS EXTERIOR

TOP =

HANDLE = SINGLE POINT (S.S. RECESSED DRAWN)

DOOR VENTILATION = SOLID SIDE VENTILATION = SOLID

BASF = LOCKS =

HINGE = 16ga CONTINUOUS PIANO TYPE HINGE WELDED TO DOOR &

RIVETED TO FRAME

CONTRACTOR NOTE

ALL CONCRETE BASES SHOULD BE LEVEL AND TROVELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS, ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4' FROM THE TOP EDGE OF THE BASE, LOCKERS MUST BE ANCHORED TO WALL.

## GAUGES

DOOR = 14 GA., C.R.S. 18 GA., C.R.S STIFFENER = FRAME = 16 GA., C.R.S TTP = 16 GA., C.R.S. BOTTOM BASE = 16 GA., C.R.S. 16 GA., C.R.S. SHELVES = 16 GA., C.R.S. SIDES = BACKS = 18 GA., C.R.S.

LATCHING: (WARDROBE) SINGLE POINT RECESSED LOCKING DEVICE PREPARED FOR BOTH PADLOCK AND BUILT-IN LOCKS.

Date:

Checked By:

SIDE VIEW

FRONT VIEW

DEGREES: ±1°

Customer: CUSTOMER



THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL PROPERTY OF LIST INDUSTRIES, INC. AND SHALL NOT BE COPIED OR DISCLOSED TO OTHERS VITHOUT VRITTEN PERMISSION. ONLY LIST INDUSTRIES RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED MODIFICATIONS RELEASES LIST INDUSTRIES FROM ALL LIABILITIES. TOLERANCES UNLESS SPECIFIED

DECIMALS: ±.010

FRACTIONS: ±1/32

DRAFTER DATE Customer Order Number: PO# Acad Number: PAGE NUMBER Sheet # Of # Description: JOB NAME Drawing Number: FOLDER NUMBER JOB LOCATION

Drawn By:

NONE

Revision: