
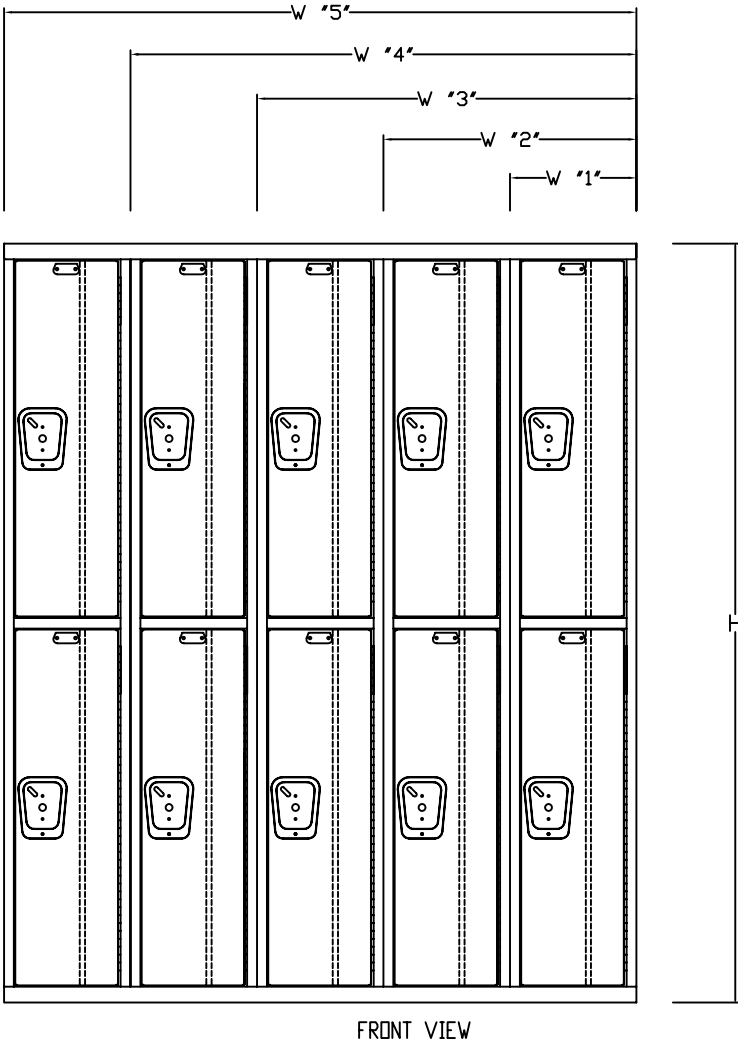


LIST "MARQUIS BOOKSAFE III" WELDED DOUBLE TIER LOCKER (9' TO 15' WIDE) (PRODUCT No. BSW \_ \_ \_ -2)

ELEVATION ' ' /

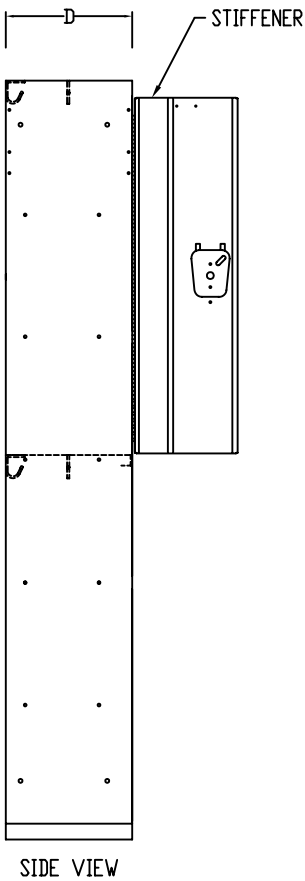

LOCKER DETAILS:

EXTERIOR COLOR =  
INTERIOR COLOR = SAME AS EXTERIOR  
TOP =  
HANDLE = SINGLE POINT (S.S. RECESSED DRAWN)  
DOOR VENTILATION = SOLID  
SIDE VENTILATION = SOLID  
BASE =  
LOCKS =  
HINGE = 16ga CONTINUOUS PIANO TYPE  
HINGE WELDED TO DOOR &  
RIVETED TO FRAME

CONTRACTOR NOTE  
ALL CONCRETE BASES SHOULD BE LEVEL AND TROVELED SMOOTH  
TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL  
FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE  
SHOULD BE RECESSED AT LEAST 1/4" FROM THE TOP EDGE  
OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

DOOR = 14 GA., C.R.S.  
STIFFENER = 18 GA., C.R.S.  
FRAME = 16 GA., C.R.S.  
TOP = 16 GA., C.R.S.  
BOTTOM BASE = 16 GA., C.R.S.  
SHELVES = 16 GA., C.R.S.  
SIDES = 16 GA., C.R.S.  
BACKS = 18 GA., C.R.S.

LATCHING: (WARDROBE) SINGLE POINT RECESSED  
LOCKING DEVICE PREPARED FOR BOTH  
PADLOCK AND BUILT-IN LOCKS.

**SUPERIOR**

THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL  
PROPERTY OF LIST INDUSTRIES, INC. AND SHALL NOT BE COPIED OR  
DISCLOSED TO OTHERS WITHOUT WRITTEN PERMISSION. ONLY LIST INDUSTRIES  
RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED  
MODIFICATIONS RELEASES LIST INDUSTRIES FROM ALL LIABILITIES.

TOLERANCES UNLESS SPECIFIED:  
FRACTIONS: ±1/32 DECIMALS: ±.010 DEGREES: ±1°

Customer: CUSTOMER

Customer Order Number: PO#

Description:

JOB NAME  
JOB LOCATION

Drawn By:  
DRAFTER

Checked By:

Date:  
DATE

Scale:  
NONE

Acad Number: PAGE NUMBER

Sheet # Of # Revision:

Drawing Number:

FOLDER NUMBER