


ELEVATION ' '

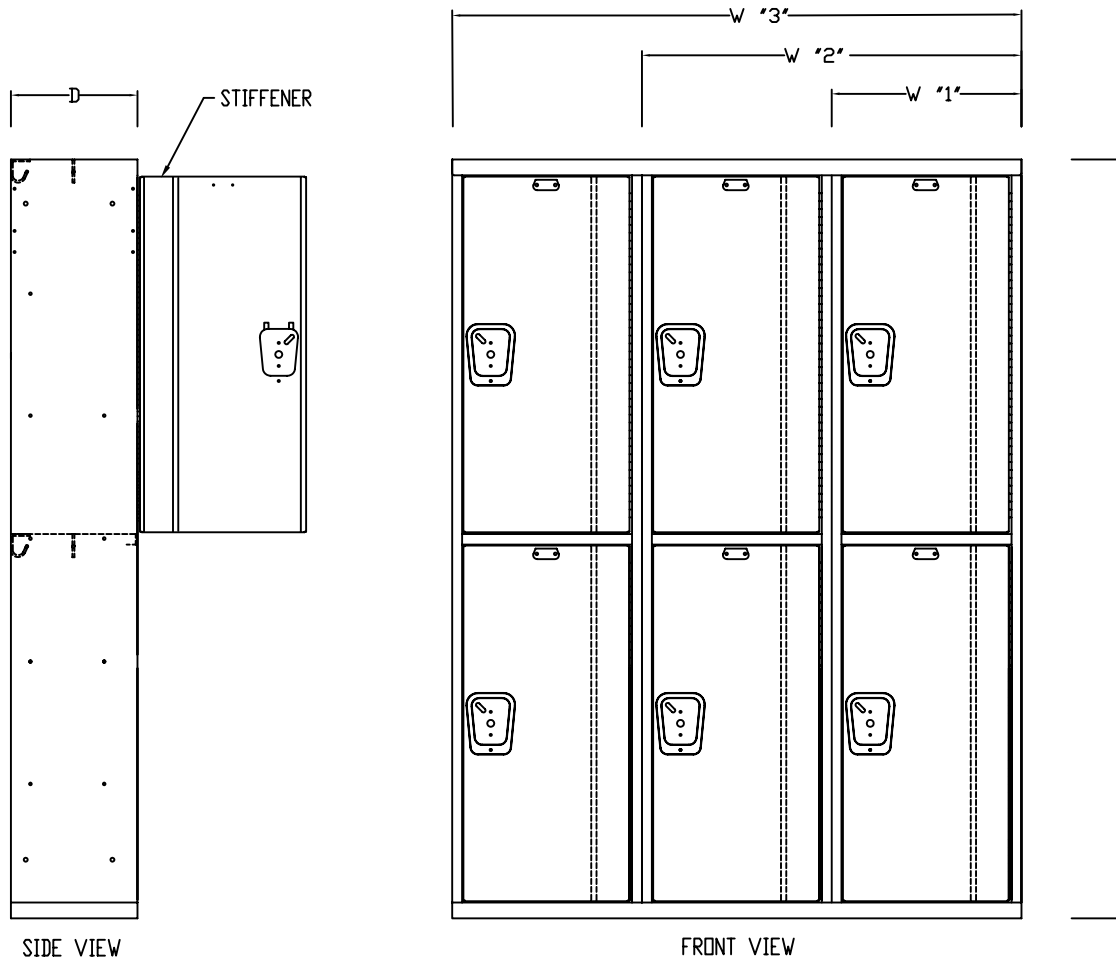

LOCKER DETAILS:

EXTERIOR COLOR =
INTERIOR COLOR = SAME AS EXTERIOR
TOP =
HANDLE = SINGLE POINT (S.S. RECESSED DRAWN)
DOOR VENTILATION = SOLID
SIDE VENTILATION = SOLID
BASE =
LOCKS =
HINGE = 16ga CONTINUOUS PIANO HINGE
HINGE WELDED TO DOOR &
RIVETED TO FRAME

CONTRACTOR NOTE

ALL CONCRETE BASES SHOULD BE LEVEL AND TROWELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4" FROM THE TOP EDGE OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

DOOR =	14 GA., C.R.S.
STIFFENER =	18 GA., C.R.S.
FRAME =	16 GA., C.R.S.
TOP =	16 GA., C.R.S.
BOTTOM BASE =	16 GA., C.R.S.
SHELVES =	16 GA., C.R.S.
SIDES =	16 GA., C.R.S.
BACKS =	18 GA., C.R.S.

LATCHING: (WARDROBE) SINGLE POINT RECESSED
LOCKING DEVICE PREPARED FOR BOTH
PADLOCK AND BUILT-IN LOCKS.

SUPERIOR

THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL PROPERTY OF LIST INDUSTRIES, INC. AND SHALL NOT BE COPIED OR DISCLOSED TO OTHERS WITHOUT WRITTEN PERMISSION. ONLY LIST INDUSTRIES RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED MODIFICATIONS RELEASES LIST INDUSTRIES FROM ALL LIABILITIES.

TOLERANCES UNLESS SPECIFIED:
FRACTIONS: $\pm 1/32$ DECIMALS: $\pm .010$ DEGREES: $\pm 1^\circ$

Customer: CUSTOMER

Customer Order Number: PO#

1	Description:	
---	--------------	--

JOB NAME

JOB LOCATION

Drawn By:	DRAFTER
-----------	---------

Checked By:	
-------------	--

Date:	
-------	--

DATE _____

Scale: NONE

Acad Number:	PAGE NUMBER
--------------	-------------

Sheet #	Of #
---------	------

Revision:

Drawing Number:

FOLDER NUMBER