



ELEVATION ' '

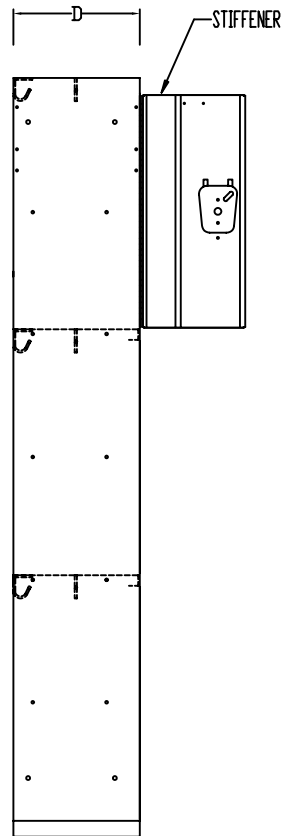

SIDE VIEW

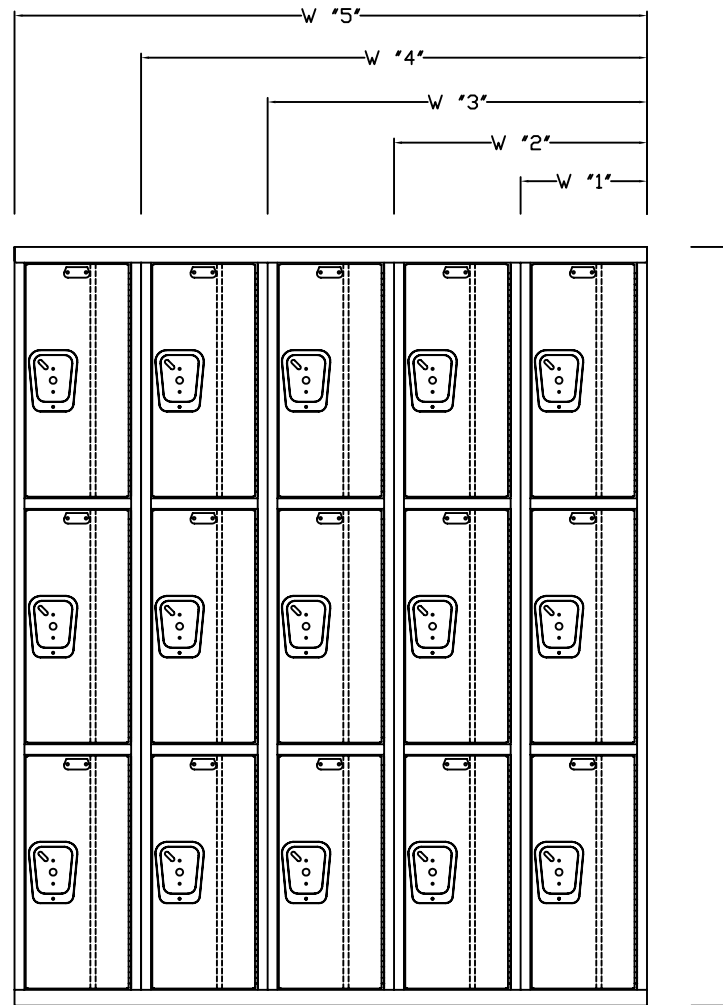

FRONT VIEW

EXTERIOR COLOR =
INTERIOR COLOR = SAME AS EXTERIOR
TOP =
HANDLE = SINGLE POINT (S.S. RECESSED DRAWN)
DOOR VENTILATION = SOLID
SIDE VENTILATION = SOLID
BASE =
LOCKS =
HINGE = 16ga CONTINUOUS PIANO HINGE
WELDED TO DOOR & RIVETED
TO FRAME

ALL CONCRETE BASES SHOULD BE LEVEL AND TROWELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4" FROM THE TOP EDGE OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

DOOR =	14 GA., C.R.S.
STIFFENER =	18 GA., C.R.S.
FRAME =	16 GA., C.R.S.
TOP =	16 GA., C.R.S.
BOTTOM BASE =	16 GA., C.R.S.
SHELVES =	16 GA., C.R.S.
SIDES =	16 GA., C.R.S.
BACKS =	18 GA., C.R.S.

LATCHING: (WARDROBE) SINGLE POINT RECESSED
LOCKING DEVICE PREPARED FOR BOTH
PADLOCK AND BUILT-IN LOCKS.



TOLERANCES UNLESS SPECIFIED:
FRACTIONS: $\pm 1/32$ DECIMALS: $\pm .010$ DEGREES: $\pm 1^\circ$

FOLDER NUMBER