



LIST "MARQUIS BOOKSAFE III" WELDED FOUR TIER LOCKER (9" TO 15" WIDE) (PRODUCT No. BSW _ _ _ -4)

ELEVATION / /

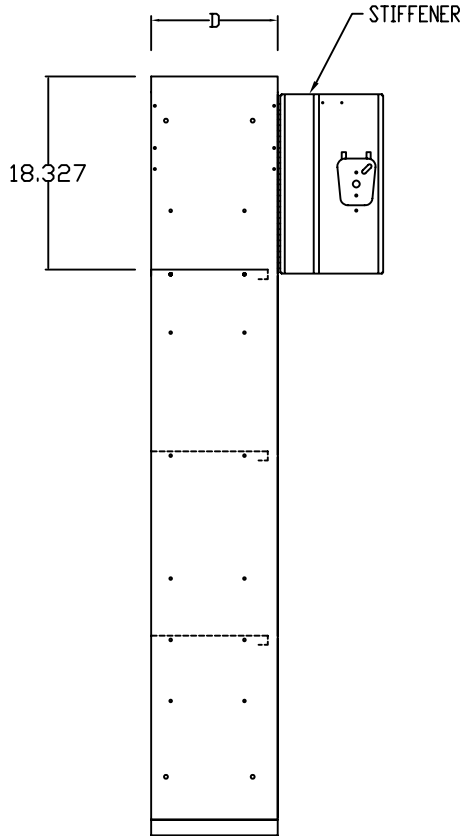

SIDE VIEW

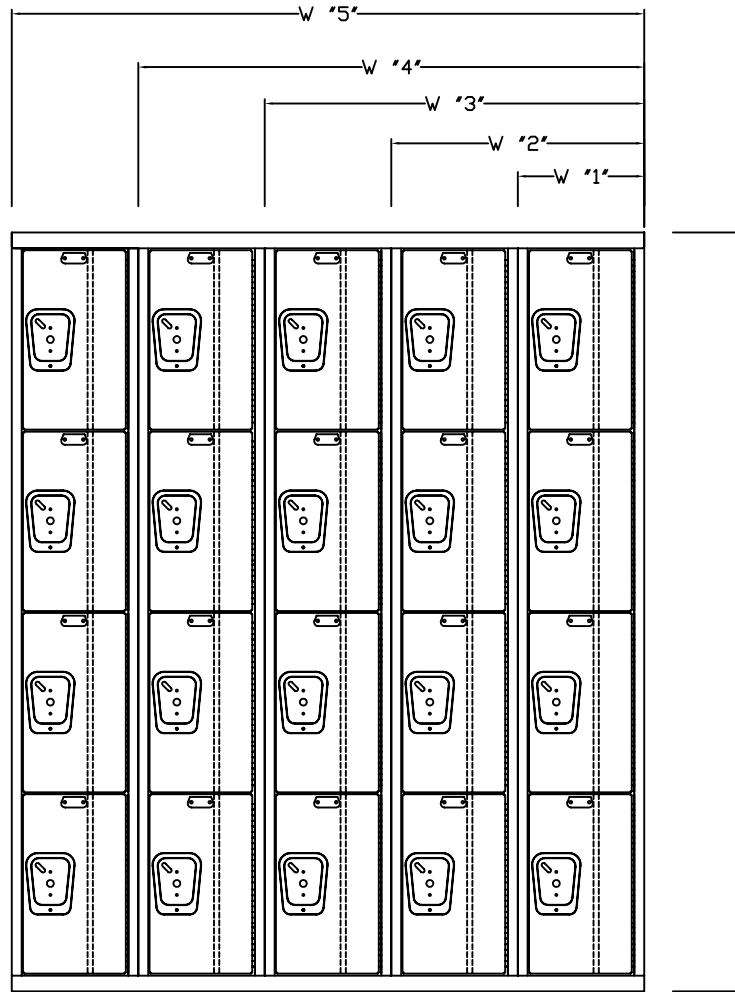

FRONT VIEW

LOCKER DETAILS:

EXTERIOR COLOR =
 INTERIOR COLOR = SAME AS EXTERIOR
 TOP =
 HANDLE = SINGLE POINT (S.S RECESSED DRAWN)
 DOOR VENTILATION = SOLID
 SIDE VENTILATION = SOLID
 BASE =
 LOCKS =
 HINGE = 16ga CONTINUOUS PIANO HINGE
 WELDED TO DOOR AND
 RIVETED TO FRAME
 CONTRACTOR NOTE
 ALL CONCRETE BASES SHOULD BE LEVEL AND TROWELED SMOOTH
 TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL
 FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE
 SHOULD BE RECESSED AT LEAST 1/4" FROM THE TOP EDGE
 OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

DOOR = 14 GA., C.R.S.
 STIFFENER = 18 GA., C.R.S.
 FRAME = 16 GA., C.R.S.
 TOP = 16 GA., C.R.S.
 BOTTOM BASE = 16 GA., C.R.S.
 SHELVES = 16 GA., C.R.S.
 SIDES = 16 GA., C.R.S.
 BACKS = 18 GA., C.R.S.

LATCHING: (BOX DOOR) SINGLE POINT RECESSED
 LOCKING DEVICE PREPARED FOR BOTH
 PADLOCK AND BUILT-IN LOCKS.

SUPERIOR

THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL
 PROPERTY OF LIST INDUSTRIES, INC. AND SHALL NOT BE COPIED OR
 DISCLOSED TO OTHERS WITHOUT WRITTEN PERMISSION. ONLY LIST INDUSTRIES
 RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED
 MODIFICATIONS RELEASES LIST INDUSTRIES FROM ALL LIABILITIES.

TOLERANCES UNLESS SPECIFIED:
 FRACTIONS: ±1/32 DECIMALS: ±.010 DEGREES: ±1°

Customer: CUSTOMER

Customer Order Number: PO#

Description:

JOB NAME
 JOB LOCATION

Drawn By:
 DRAFTER

Checked By:

Date:

DATE

Scale:
 NONE

Acad Number: PAGE NUMBER

Sheet # Of # Revision:

Drawing Number:

FOLDER NUMBER