

LIST "HEAVY DUTY CORRIDOR PREMIER" K.D. SINGLE TIER LOCKER (9" TO 15" WIDE) (PRODUCT No. HDCP____ -1_)

ELEVATION ' '

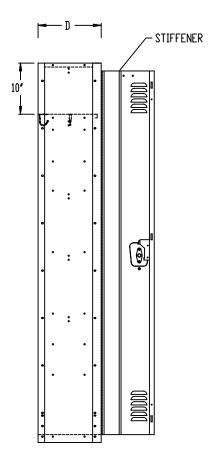

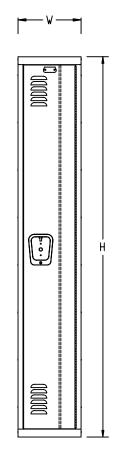

LOCKER DETAILS:

DOOR & FRAME COLOR =

BODY COMPONENT COLOR = 729 PARCHMENT

TOP =

HANDLE = LIFT (S.S. RECESSED DRAWN)

DOOR VENTILATION = 3' LOUVERS

SIDE VENTILATION = SOLID

BASE =

HINGE = CONTINUOUS PIANO TYPE

CONTRACTOR NOTE

ALL CONCRETE BASES SHOULD BE LEVEL AND TROVELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4' FROM THE TOP EDGE OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

DDDR = 14 GA., C.R.S.
STIFFENER = 18 GA., C.R.S
FRAME = 16 GA., C.R.S
TOP = 24 GA., C.R.S.
BOTTOM = 24 GA., C.R.S.
SHELVES = 24 GA., C.R.S.
SIDES = 24 GA., C.R.S.
BACKS = 24 GA., C.R.S.

LATCHING: (WARDROBE) THREE POINT RECESSED ON LOCKER
DOORS 48' AND OVER, TWO POINT RECESSED ON
ON LOCKER DOORS 36' TO 20'. AUTOMATIC
LOCKING DEVICE WITH LIFT-TYPE PADLOCK HASP.

SIDE VIEW

FRONT VIEW



THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL PROPERTY OF LIST INDUSTRIES, INC. AND SHALL NOT BE COPIED OR DISCLOSED TO OTHERS VITHOUT VRITTEN PERMISSION. ONLY LIST INDUSTRIES RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED MODIFICATIONS RELEASES LIST INDUSTRIES FROM ALL LIABILITIES.

TOLERANCES UNLESS SPECIFIED:
FRACTIONS: ±1/32 DECIMALS: ±.010 DEGREES: ±1*

Customer: CUSTOMER

Customer Order Number: PO#

Customer Order Number: PO#

Description: JOB NAME

JOB LOCATION

DRAFTER

Acad Number: PAGE NUMBER

Drawing Number: FOI

Drawn By:

Checked By: Date:

FOLDER NUMBER