

LIST "HEAVY DUTY CORRIDOR PREMIER" K.D. DOUBLE TIER LOCKER (9" TO 15" WIDE) (PRODUCT No. HDCP \_ \_ \_ \_ -2\_)

## ELEVATION '

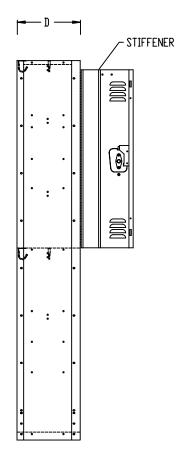



FRONT VIEW

LOCKER DETAILS:

DOOR & FRAME COLOR =

BODY COMPONENT COLOR = 729 PARCHMENT

TOP =

HANDLE = LIFT (S.S. RECESSED DRAWN)

DOOR VENTILATION = 3' LOUVERS

SIDE VENTILATION = SOLID BASE =

LOCKS =

HINGE = CONTINUOUS PIANO TYPE

CONTRACTOR NOTE

ALL CONCRETE BASES SHOULD BE LEVEL AND TROVELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4' FROM THE TOP EDGE OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

DOOR = 14 GA., C.R.S. STIFFENER = 18 GA., C.R.S.

FRAME = 16 GA., C.R.S TDP = 24 GA., C.R.S.

BOTTOM = 24 GA., C.R.S.

SHELVES = 24 GA., C.R.S. SIDES = 24 GA., C.R.S.

BACKS = 24 GA., C.R.S.

LATCHING: (WARDROBE) TWO POINT RECESSED AUTO-MATIC LOCKING DEVICE WITH LIFT-TYPE PADLOCK HASP. 36' TO 20' TALL DOORS.

SIDE VIEW

*SUPERIOR* 

THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL PROPERTY OF LIST INDUSTRIES, INC. AND SHALL NOT BE COPIED OR DISCLOSED TO OTHERS WITHOUT WRITTEN PERMISSION DNLY LIST INDUSTRIES RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED MODIFICATIONS RELEASES LIST INDUSTRIES FROM ALL LIABILITIES.
TOLLERANCES UNLESS SPECIFIED

TOLERANCES UNLESS SPECIFIED:
FRACTIONS: ±1/32 DECIMALS: ±.010 DEGREES: ±1\*

Checked By: Drawn By: Date: Customer: CUSTOMER NONE DRAFTER DATE Customer Order Number: PO# Acad Number: PAGE NUMBER Sheet # Of # Revision: Description: JOB NAME Drawing Number: FOLDER NUMBER JOB LOCATION