

LIST "HEAVY DUTY VENTILATED" K.D. SINGLE TIER LOCKER (18 OR 24" WIDE) (PRODUCT No. HDV ____1_)

ELEVATION ' '

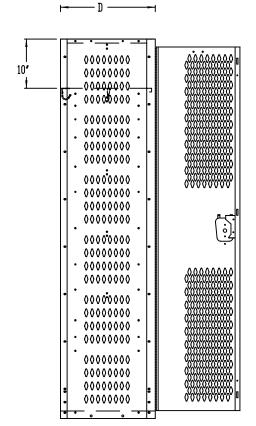

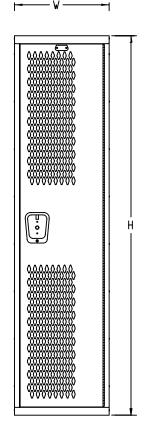

INCKER DETAILS:

DOOR & FRAME COLOR =

BODY COMPONENT COLOR = 729 PARCHMENT OR

725 HALLOWELL GRAY

TOP =

HANDLE = LIFT (S.S. RECESSED DRAWN) DOOR VENTILATION = 5/8" x 1-1/2" DIAMOND SIDE VENTILATION = 5/8" x 1-1/2" DIAMOND

BASE = LOCKS =

HINGE = CONTINUOUS PIANO HINGE

CONTRACTOR NOTE

ALL CONCRETE BASES SHOULD BE LEVEL AND TROWELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4' FROM THE TOP EDGE OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

14 GA., C.R.S. FRAME = 16 GA., C.R.S TOP = 16 GA., C.R.S. BOTTOM = 16 GA., C.R.S. SHELVES = 16 GA., C.R.S. 16 GA., C.R.S. SIDES = BACKS = 18 GA., C.R.S.

LATCHING: (WARDROBE) THREE POINT RECESSED ON LOCKER DOORS 48" AND OVER, TWO POINT RECESSED ON ON LOCKER DOORS 36" TO 20". AUTOMATIC LOCKING DEVICE WITH LIFT-TYPE PADLOCK HASP.

FRUNT VIFW SIDE VIEW



THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL PROPERTY OF LIST INDUSTRIES, INC. AND SHALL NOT BE COPIED OR DISCLOSED TO OTHERS WITHOUT WRITTEN PERMISSION, ONLY LIST INDUSTRIES RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED MODIFICATIONS RELEASES LIST INDUSTRIES FROM ALL LIABILITIES.

TOLERANCES UNLESS SPECIFIED FRACTIONS: ±1/32 DECIMALS: ±.010 DEGREES: ±1°

Customer: CUSTOMER Customer Order Number: PO#

Description:

JOB NAME JOB LOCATION

Checked By: Drawn By: DRAFTER

Acad Number:

Drawing Number:

DATE PAGE NUMBER Sheet # Of #

FOLDER NUMBER

NONE

Revision: