

LIST 'HEAVY DUTY VENTILATED' K.D. ATHLETIC SIX TIER LOCKER (9' TO 15' WIDE) (PRODUCT No. HDV _ _ _ _ _ -6_)

ELEVATION ' '



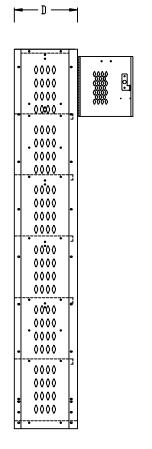



LOCKER DETAILS:

DOOR & FRAME COLOR =

BODY COMPONENT COLOR = 729 PARCHMENT OR 725 HALLOWELL GRAY

TOP =

HANDLE = FRICTION CATCH FINGER PULL DOOR VENTILATION = 7/16' x 15/16' DIAMOND SIDE VENTILATION = 5/8' x 1-1/2' DIAMOND

BASE =

HINGE = FULL PIAND HINGE,

HINGE, WELDED TO DOOR AND RIVETED TO FRAME

CONTRACTOR NOTE

ALL CONCRETE BASES SHOULD BE LEVEL AND TROVELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLODRING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4' FROM THE TOP EDGE OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

DDDR = 14 GA., C.R.S. FRAME = 16 GA., C.R.S. TDP = 16 GA., C.R.S. BDTTDM = 16 GA., C.R.S. SHELVES = 16 GA., C.R.S. SIDES = 16 GA., C.R.S. BACKS = 18 GA., C.R.S.

LATCHING: (BOX DOOR) SINGLE POINT FRICTION
CATCH WITH DOOR PULL, DOOR WILL
ACCEPT BUILT-IN LOCK OR PADLOCK.

SIDE VIEW

FRONT VIEW



THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL
PROPERTY OF LIST INDUSTRIES, INC. AND SHALL NOT BE COPIED OR
DISCLOSED TO OTHERS WITHOUT WRITTEN PERMISSION, ONLY LIST INDUSTRIES
RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED
MODIFICATIONS RELEASES LIST INDUSTRIES FROM ALL LIABILITIES.
TOLERANCES UNLESS SPECIFIED
FRACTIONS: ±1/32 DECIMALS: ±.010 DEGREES: ±1*

Customer: CUSTOMER	Drawn By: DRAFTER		Checked By:	Date: DATE		Scale: NONE	
Customer Order Number: PO#		L		U -			
Description: IOD NAME	Acad Number:	PAG	e number		Sheet #	Of #	Revision:
JOB NAME JOB LOCATION	Drawing Numbe	ŀ	FOLDER NUMBER				