

## 

# ELEVATION ' '

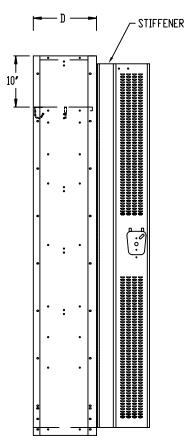



#### INCKER DETAILS:

DOOR & FRAME COLOR =

BODY COMPONENT COLOR = 729 PARCHMENT

HANDLE = SINGLE POINT (S.S. RECESSED DRAWN)
DOOR VENTILATION = PLAIN

OPTIONAL SECURITY-PLUS VENTS SHOWN

SIDE VENTILATION = SOLID

BASE =

HINGE = CONTINUOUS PIANO HINGE

#### CONTRACTOR NOTE

ALL CONCRETE BASES SHOULD BE LEVEL AND TROVELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4' FROM THE TOP EDGE OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

### **GAUGES**

DDDR = 14 GA., C.R.S.
STIFFENER = 18 GA., C.R.S.
FRAME = 16 GA., C.R.S.
TOP = 24 GA., C.R.S.
BOTTOM BASE = 24 GA., C.R.S.
SHELVES = 24 GA., C.R.S.
SIDES = 24 GA., C.R.S.
BACKS = 24 GA., C.R.S.

LATCHING: (WARDROBE) SINGLE POINT RECESSED
LOCKING DEVICE PREPARED FOR BOTH
PADLOCK AND BUILT-IN LOCKS.

SIDE VIEW FRONT VIEW



THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL PROPERTY OF LIST INDUSTRIES, INC. AND SHALL NOT BE COPIED OR DISCLOSED TO DITHERS WITHOUT VRITTEN PERMISSION. ONLY LIST INDUSTRIES RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED MODIFICATIONS RELEASES LIST INDUSTRIES FROM ALL LIABILITIES.

TO LEGANCES LINE SES SPECIFIED.

TOLERANCES UNLESS SPECIFIED:
FRACTIONS: ±1/32 DECIMALS: ±.010 DEGREES: ±1\*

Drawn By: Checked By: Date: Customer: CUSTOMER NONE DRAFTER DATE Customer Order Number: PO# Acad Number: PAGE NUMBER Sheet # Of # Revision: Description: JOB NAME Drawing Number: FOLDER NUMBER JOB LOCATION