

LIST "MARQUIS STUDENT" K.D. DOUBLE TIER LOCKER (18" OR 24" WIDE) (PRODUCT No. LMS -2)

ELEVATION ' '

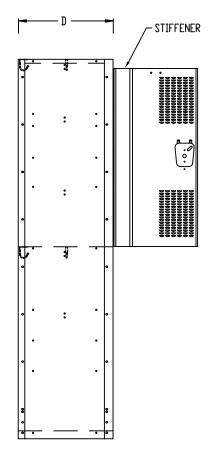

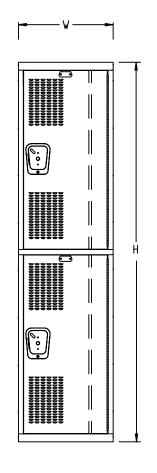

LOCKER DETAILS: DOOR & FRAME COLOR =

BODY COMPONENT COLOR = 729 PARCHMENT

HANDLE = SINGLE POINT (S.S. RECESSED DRAWN)

DOOR VENTILATION = PLAIN OPTIONAL SECURITY-PLUS VENTS SHOWN

SIDE VENTILATION = SOLID

BASE =

LOCKS =

HINGE = CONTINUOUS PIANO HINGE

CONTRACTOR NOTE

ALL CONCRETE BASES SHOULD BE LEVEL AND TROVELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4' FROM THE TOP EDGE OF THE BASE, LOCKERS MUST BE ANCHORED TO WALL.

**GAUGES** 

DOOR = 14 GA., C.R.S. STIFFENER = 18 GA., C.R.S. FRAME = 16 GA., C.R.S TNP = 24 GA., C.R.S. BOTTOM BASE = 24 GA., C.R.S. SHELVES = 24 GA., C.R.S. SIDES = 24 GA., C.R.S. 24 GA., C.R.S. BACKS =

LATCHING: (WARDROBE) SINGLE POINT RECESSED LOCKING DEVICE PREPARED FOR BOTH PADLOCK AND BUILT-IN LOCKS.

SIDE VIEW

FRONT VIEW



THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL PROPERTY OF LIST INDUSTRIES, INC. AND SHALL NOT BE COPIED OR DISCLOSED TO OTHERS VITHOUT VRITTEN PERMISSION. ONLY LIST INDUSTRIES RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED MODIFICATIONS RELEASES LIST INDUSTRIES FROM ALL LIABILITIES. TOLERANCES UNLESS SPECIFIED

FRACTIONS: ±1/32 DECIMALS: ±.010 DEGREES: ±1°

Customer: CUSTOMER Customer Order Number: PO# Description:

JOB NAME JOB LOCATION Drawn By: DRAFTER Acad Number: PAGE NUMBER

Drawing Number:

Checked By: Date: DATE Sheet # Of #

FOLDER NUMBER

LMS-2W 11-21-12

NONE

Revision: