LIST "JR. VARSITY" DOUBLE TIER LOCKER (9" TO 15" WIDE) (PRODUCT No. LWA _ _ _ -2)

ELEVATION ' '

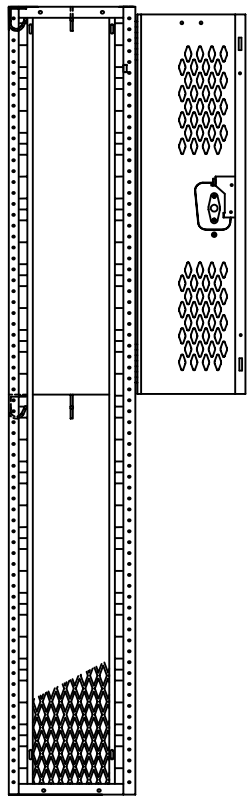

SIDE VIEW

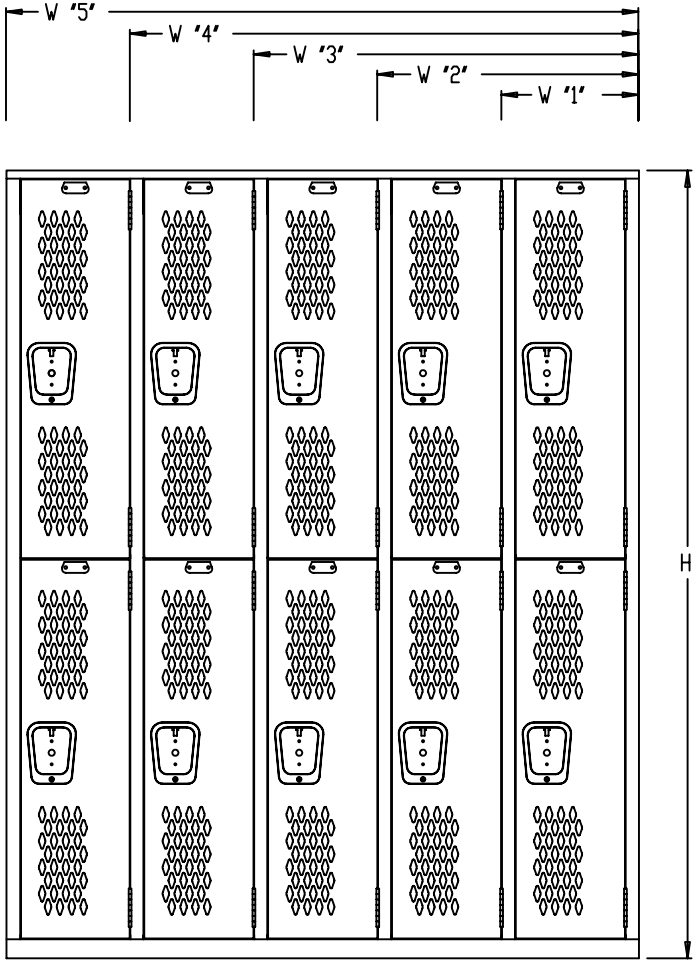

FRONT VIEW

LOCKER DETAILS:

EXTERIOR COLOR =
INTERIOR COLOR = SAME AS EXTERIOR
TOP =
HANDLE = LIFT (S.S. RECESSED DRAWN)
DOOR VENTILATION = 5/8" x 1-1/2" DIAMOND
SIDE VENTILATION = 1/2" 13 GA. FLT/EXP/MTL
BASE =
LOCKS =
HINGE = 7-KNUCKLE, 13 GA. BUTT HINGE WELDED TO DOOR & RIVETED TO FRAME

CONTRACTOR NOTE

ALL CONCRETE BASES SHOULD BE LEVEL AND TROWELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4" FROM THE TOP EDGE OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

DOOR =	14 GA., C.R.S
FRAME =	16 GA., C.R.S
TOP =	16 GA., C.R.S.
BOTTOM =	16 GA., GALVANNEAL
HAT SHELVES =	16 GA., GALVANNEAL
INT/MED SHELVES =	16 GA., GALVANNEAL
SIDES =	1/2" 13 GA. FLT/EXP/MTL, H.P.D
BACKS =	18 GA., C.R.S.

LATCHING: (WARDROBE) TWO POINT RECESSED AUTOMATIC LOCKING DEVICE WITH LIFT-TYPE PADLOCK HASP. 36" TO 20" TALL DOORS.

HINGES: (WARDROBE) TWO HINGES ON LOCKER DOORS 36" AND UNDER.

SUPERIOR

THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL PROPERTY OF LIST INDUSTRIES, INC. AND SHALL NOT BE COPIED OR DISCLOSED TO OTHERS WITHOUT WRITTEN PERMISSION. ONLY LIST INDUSTRIES RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED MODIFICATIONS RELEASES LIST INDUSTRIES FROM ALL LIABILITIES.

TOLERANCES UNLESS SPECIFIED:
FRACTIONS: ±1/32 DECIMALS: ±.010 DEGREES: ±1°

Customer: CUSTOMER
Customer Order Number: PO#
Description: JOB NAME
JOB LOCATION

Drawn By:	Checked By:	Date:	Scale:
DRAFTER		DATE	NONE

Acad Number: PAGE NUMBER | Sheet # Of # | Revision:

Drawing Number: FOLDER NUMBER

LW-2 11-21-12