


LIST "P.E. SERIES" FOUR TIER LOCKER (9" TO 15" WIDE) (PRODUCT No. LWA \_ \_ \_ -4)

ELEVATION / /

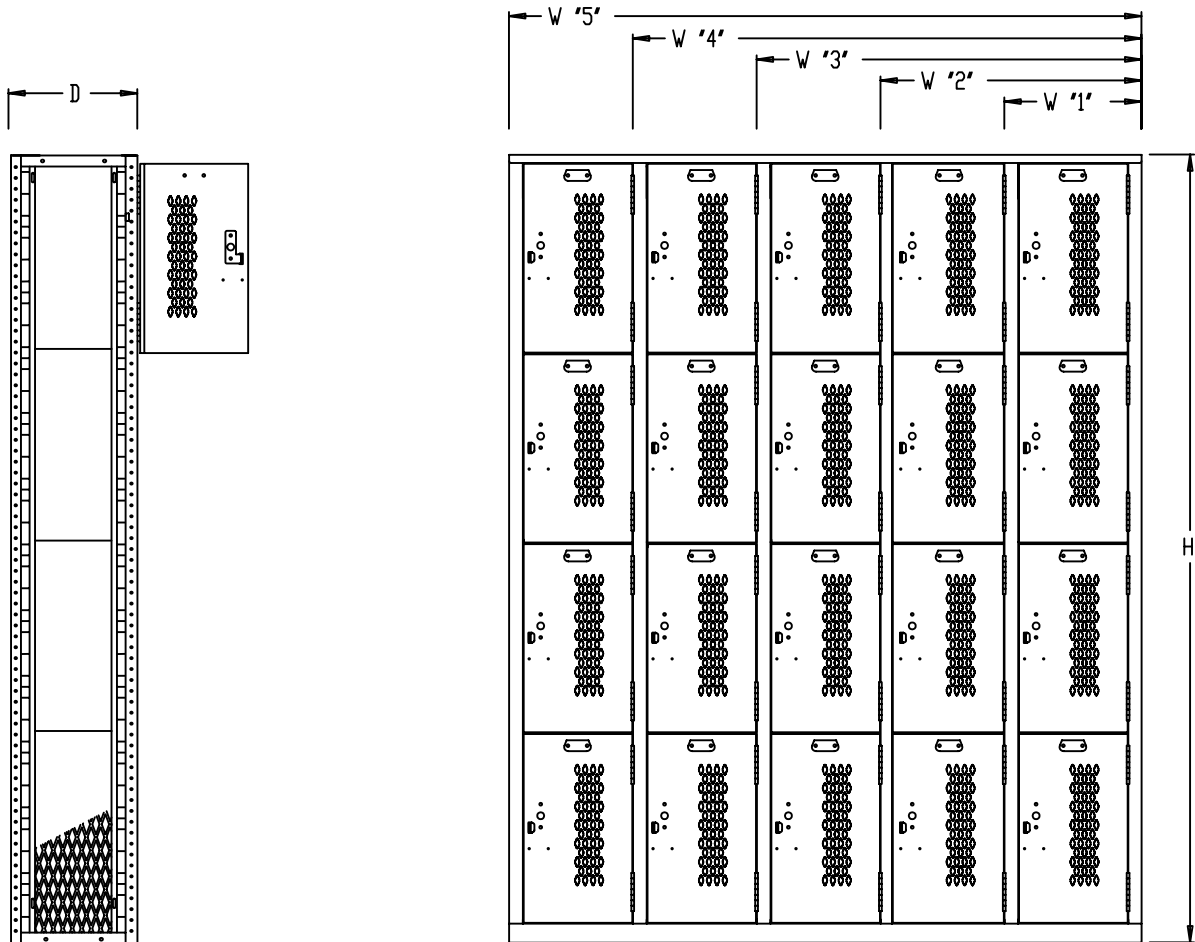

SIDE VIEW

FRONT VIEW

LOCKER DETAILS:

EXTERIOR COLOR =  
 INTERIOR COLOR = SAME AS EXTERIOR  
 TOP =  
 HANDLE = SINGLE POINT FINGER PULL LATCH  
 DOOR VENTILATION = 7/16" x 15/16" DIAMOND  
 SIDE VENTILATION = 1/2" 13 GA. FLT/EXP/MTL  
 BASE =  
 LOCKS =  
 HINGE = 7-KNUCKLE, 13 GA. BUTT  
 HINGE WELDED TO DOOR &  
 RIVETED TO FRAME

CONTRACTOR NOTE  
 ALL CONCRETE BASES SHOULD BE LEVEL AND TROWELED SMOOTH  
 TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL  
 FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE  
 SHOULD BE RECESSED AT LEAST 1/4" FROM THE TOP EDGE  
 OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

DOOR = 14 GA., C.R.S.  
 FRAME = 16 GA., C.R.S.  
 TOP = 16 GA., C.R.S.  
 BOTTOM = 16 GA., GALVANNEAL  
 HAT SHELVES = 16 GA., GALVANNEAL  
 INT/MED SHELVES = 16 GA., GALVANNEAL  
 SIDES = 1/2" 13 GA. FLT/EXP/MTL, H.P.D.  
 BACKS = 18 GA., C.R.S.

LATCHING: (BOX DOOR, SIDE HINGE) SINGLE  
 POINT HEAVY DUTY SPRING LATCH.

HINGES: (BOX DOOR, SIDE HINGE) TWO  
 HINGES ON EACH DOOR. PADLOCK  
 ONLY ON 9" WIDE.



THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL  
 PROPERTY OF LIST INDUSTRIES, INC. AND SHALL NOT BE COPIED OR  
 DISCLOSED TO OTHERS WITHOUT WRITTEN PERMISSION. ONLY LIST INDUSTRIES  
 RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED  
 MODIFICATIONS RELEASES LIST INDUSTRIES FROM ALL LIABILITIES.

TOLERANCES UNLESS SPECIFIED:  
 FRACTIONS: ±1/32      DECIMALS: ±.010      DEGREES: ±1°

Customer: CUSTOMER

Customer Order Number: PO#

Description:

JOB NAME  
 JOB LOCATION

Drawn By:  
 DRAFTER

Checked By:

Date:

DATE

Scale:  
 NONE

Acad Number: PAGE NUMBER

Sheet # Of #

Revision:

Drawing Number:

FOLDER NUMBER