

LIST "GRADUATE" DOUBLE TIER LOCKER (9" TO 15" WIDE) (PRODUCT No. LWC _ _ _ -2) ELEVATION ' ' | -- | '5' | -- | '3' | -- | '2' | -- | '1' -

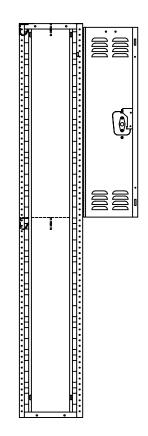

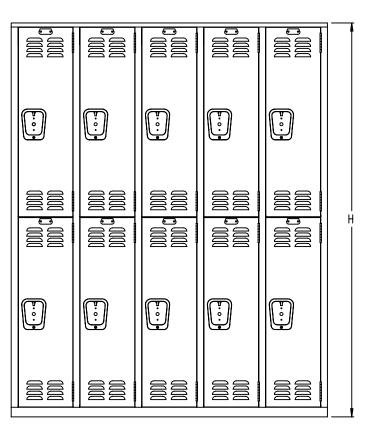

FRONT VIEW

LOCKER DETAILS:

EXTERIOR COLOR =

INTERIOR COLOR = SAME AS EXTERIOR

TOP =

HANDLE = LIFT (S.S. RECESSED DRAWN)

DOOR VENTILATION = 3' LOUVER SIDE VENTILATION = SOLID

BASE =

LOCKS =

HINGE = 7-KNUCKLE, 13 GA. BUTT

HINGE WELDED TO DOOR & RIVETED TO FRAME

CONTRACTOR NOTE

ALL CONCRETE BASES SHOULD BE LEVEL AND TROVELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4' FROM THE TOP EDGE OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

DOOR = 14 GA., C.R.S FRAME = 16 GA., C.R.S TOP = 16 GA., C.R.S.

BOTTOM = 16 GA., GALVANNEAL HAT SHELVES = 16 GA., GALVANNEAL

INT/MED SHELVES = 16 GA., GALVANNEAL

SIDES = 18 GA., C.R.S. BACKS = 18 GA., C.R.S.

LATCHING: (WARDROBE) THREE POINT RECESSED ON LOCKER DOORS 48' AND OVER, TWO POINT RECESSED ON ON LOCKER DOORS 36' TO 20'. AUTOMATIC LOCKING DEVICE WITH LIFT-TYPE PADLOCK HASP.

HINGES: (WARDROBE) TWO HINGES ON LOCKER
DOORS 36" AND UNDER.

SUPERIOR

SIDE VIEW

THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL PROPERTY OF LIST INDUSTRIES, INC. AND SHALL NOT BE COPIED OR DISCLOSED TO OTHERS VITHOUT VRITTEN PERMISSION. ONLY LIST INDUSTRIES RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED MODIFICATIONS RELEASES LIST INDUSTRIES FROM ALL LIABILITIES.

TOLERANCES UNLESS SPECIFIED:
FRACTIONS: ±1/32 DECIMALS: ±010 DEGREES: ±1*

Customer: CUSTOMER
Customer Order Number: PO#
Description:

JOB NAME

JOB LOCATION

Drawn By: Checked By: DRAFTER

Acad Number: PAGE NUMBER

Date: DATE

DATE NONE

Sheet # Of # Revision:

Drawing Number: FOLDER NUMBER