

LIST "GRADUATE" PREMIER DOUBLE TIER LOCKER (PRODUCT No. LPC_ _ _ -2) ELEVATION ' '

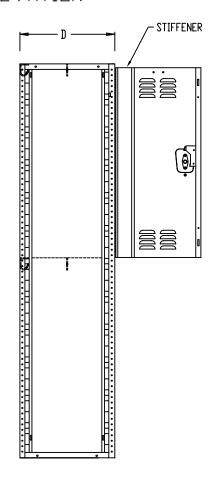

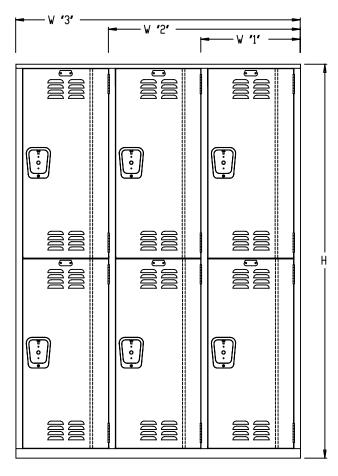

FRONT VIEW

DEGREES: ±1°

LOCKER DETAILS:

EXTERIOR COLOR =

INTERIOR COLOR = SAME AS EXTERIOR

TOP :

HANDLE = LIFT (S.S. RECESSED DRAWN)

DOOR VENTILATION = 3' LOUVER

SIDE VENTILATION = SOLID

BASE =

HINGE = 7-KNUCKLE, 13 GA. BUTT

HINGE WELDED TO DOOR & RIVETED TO FRAME

KIACICA IO LVUUL

CONTRACTOR NOTE

ALL CONCRETE BASES SHOULD BE LEVEL AND TROVELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4" FROM THE TOP EDGE OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

DDDR = 14 GA., C.R.S.

STIFFENER = 18 GA., C.R.S.

FRAME = 16 GA., C.R.S.

TDP = 16 GA., C.R.S.

BDTTDM = 16 GA., GALVANNEAL

HAT SHELVES = 16 GA., GALVANNEAL INT/MED SHELVES = 16 GA., GALVANNEAL

SIDES = 18 GA., C.R.S. BACKS = 18 GA., C.R.S.

LATCHING: (WARDROBE) THREE POINT RECESSED ON LOCKER
DOORS 48' AND OVER, TWO POINT RECESSED ON
ON LOCKER DOORS 36' TO 20'. AUTOMATIC
LOCKING DEVICE WITH LIFT-TYPE PADLOCK HASP.

HINGES: (WARDROBE) TWO HINGES ON LOCKER
DOORS 36" AND UNDER.

SUPERIOR

SIDE VIEW

THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL PROPERTY OF LIST INDUSTRIES, INC. AND SHALL NOT BE COPIED OR DISCLUSED TO OTHERS WITHOUT WRITTEN PERMISSION DINLY LIST INDUSTRIES RESERVES THE RIGHT TO ALTER ANY DESIGN ANY UNAUTHORIZED MODIFICATIONS RELEASES LIST INDUSTRIES FROM ALL LIABILITIES.

TOLERANCES UNLESS SPECIFIED

DECIMALS: ±.010

FRACTIONS: ±1/32

Customer: CUSTOMER

Customer Order Number: PO#

Description:

Drawn By: Checked By:
DRAFTER

Acad Number: PAGE NUMBER

Drawing Number:

Checked By: Date:

JOB NAME
JOB LOCATION

Drawing Number: FOLDER NUMBER