

LIST "MARQUIS PROTECTOR" WELDED CORRIDOR SINGLE TIER LOCKER (18" OR 24" WIDE) (PRODUCT No. LMP _ _ _ -1) ELEVATION ' '

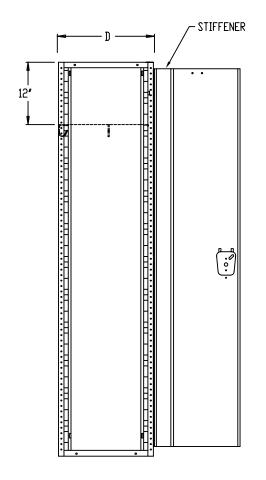

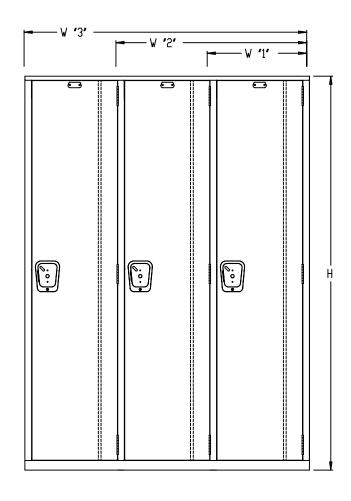

LOCKER DETAILS:

EXTERIOR COLOR =

INTERIOR COLOR = SAME AS EXTERIOR

HANDLE = SINGLE POINT (S.S. RECESSED DRAWN)

DOOR VENTILATION = SOLID

SIDE VENTILATION = SOLID

BASF = I TICKS =

HINGE = 7-KNUCKLE, 13 GA. BUTT

HINGE WELDED TO DOOR &

RIVETED TO FRAME

CONTRACTOR NOTE

ALL CONCRETE BASES SHOULD BE LEVEL AND TROWELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4' FROM THE TOP EDGE OF THE BASE, LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

DNNR = 14 GA., C.R.S. STIFFENER = 18 GA., C.R.S. FRAME = 16 GA., C.R.S 16 GA., C.R.S. TOP = 16 GA., GALVANNEAL BOTTOM = HAT SHELVES = 16 GA., GALVANNEAL INT/MED SHELVES = 16 GA., GALVANNEAL SIDES = 18 GA., C.R.S. BACKS = 18 GA., C.R.S.

LATCHING: (WARDROBE) SINGLE POINT RECESSED LOCKING DEVICE PREPARED FOR BOTH PADLOCK AND BUILT-IN LOCKS.

HINGES: (WARDROBE) THREE HINGES ON LOCKER DOORS 48" AND OVER, TWO HINGES ON LOCKER DOORS 36" AND UNDER.

SIDE VIEW FRONT VIEW



THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL PROPERTY OF LIST INDUSTRIES, INC. AND SHALL NOT BE COPIED OR DISCLOSED TO OTHERS VITHOUT VRITTEN PERMISSION. ONLY LIST INDUSTRIES RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED MODIFICATIONS RELEASES LIST INDUSTRIES FROM ALL LIABILITIES. TOLERANCES UNLESS SPECIFIED

FRACTIONS: ±1/32 DECIMALS: ±.010 DEGREES: ±1*

Drawn By: Customer: CUSTOMER DRAFTER Customer Order Number: PO# Description: JOB NAME Drawing Number: JOB LOCATION

Checked By: Date: NONE DATE Acad Number: PAGE NUMBER Sheet # Of # Revision: FOLDER NUMBER

MP-1V 11-21-12