


LIST "MARQUIS PROTECTOR" WELDED CORRIDOR FIVE TIER LOCKER (9" TO 15" WIDE) (PRODUCT No. LMP _ _ _ -5)

FIFVATION ' '

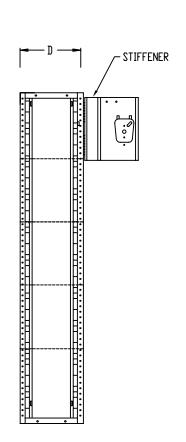



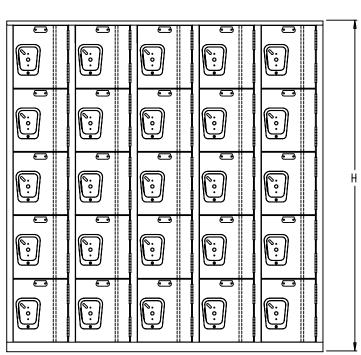

Customer: CUSTOMER

INCKER DETAILS:

EXTERIOR COLOR =

INTERIOR COLOR = SAME AS EXTERIOR

HANDLE = SINGLE POINT (S.S. RECESSED DRAWN)

DOOR VENTILATION = SOLID SIDE VENTILATION = SOLID

BASE = LOCKS =

HINGE = 7-KNUCKLE, 13 GA. BUTT

HINGE WELDED TO DOOR & RIVETED TO FRAME

CONTRACTOR NOTE

ALL CONCRETE BASES SHOULD BE LEVEL AND TROWELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS, ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4' FROM THE TOP EDGE OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

DOOR = 14 GA., C.R.S. 18 GA., C.R.S. STIFFENER = FRAME = 16 GA., C.R.S 16 GA., C.R.S. TOP = BOTTOM = 16 GA., GALVANNEAL HAT SHELVES = 16 GA., GALVANNEAL INT/MED SHELVES = 16 GA., GALVANNEAL SIDES = 18 GA., C.R.S. BACKS = 18 GA., C.R.S.

LATCHING: (BOX DOOR) SINGLE POINT RECESSED LOCKING DEVICE PREPARED FOR BOTH PADLOCK AND BUILT-IN LOCKS.

HINGES: (BOX DOOR) TWO HINGES ON LOCKER DOORS 36" AND UNDER.

Drawn By:

DRAFTER

Drawing Number:

FRONT VIEW SIDE VIEW

FRACTIONS: ±1/32



THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL PROPERTY OF LIST INDUSTRIES, INC. AND SHALL NOT BE COPIED OR DISCLOSED TO OTHERS VITHOUT VRITTEN PERMISSION. ONLY LIST INDUSTRIES RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED MODIFICATIONS RELEASES LIST INDUSTRIES FROM ALL LIABILITIES. TOLERANCES UNLESS SPECIFIED

DECIMALS: ±.010

DEGREES: ±1*

Customer Order Number: PO# Description: JOB NAME JOB LOCATION

Checked By: Date: NONE DATE Acad Number: PAGE NUMBER Sheet # Of # Revision: FOLDER NUMBER

MP-5 11-21-12